


Data Sheet

Itemnumber....: 3240901159

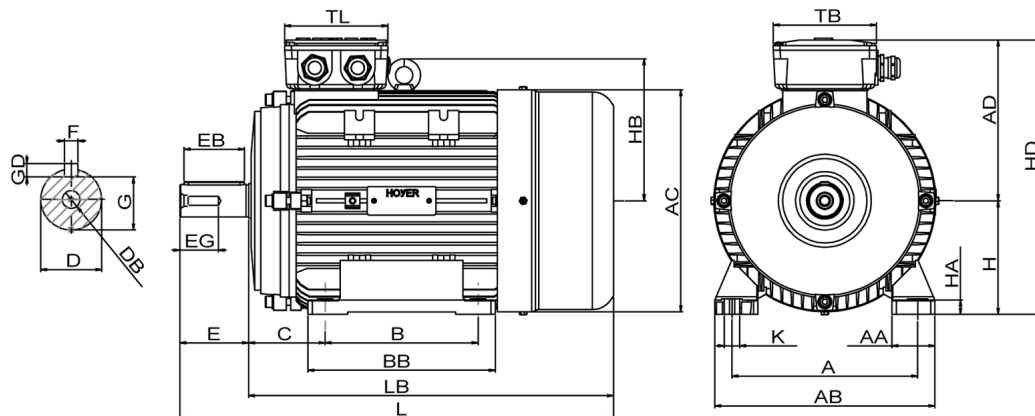

A = 140	AC = 175	BB = 155	DB = M8	EG = 24	GD = 7	HD = 222	LB = 312
AA = 35	AD = 132	C = 56	E = 50	F = 8	H = 90	K = 12	TB = 100
AB = 177	B = 125	D = 24	EB = 40	G = 20	HA = 13	L = 362	TL = 100

Version

Type.....: HMA2 90L-4
Design.....: Induction motor
Standard series.....: IEC 60034
Phase / Voltage range.....: 3~ / Low

Electrical design

Efficiency.....: IE2
Pole.....: 4
Power at 50 Hz (kW).....: 1,50
Hz.....: 60 (60 Hz output)
Voltage.....: 440VD
Winding voltage.....: 400VD/690VY 50 Hz
Power output (kW).....: 1,74
Duty.....: S1
Insulation class.....: F
Temperature rise.....: B

Mechanical design

Frame size.....: 90
Mounting.....: B3
Rain cap.....: No
Protection class.....: IP55
Cooling method.....: IC411/TEFC
External grounding.....: Yes
Drain hole.....: Yes
Frame material.....: Aluminium
Material approval.....: None
Shaft.....: IEC standard
Key.....: Closed key
Balancing.....: Half key balancing
Vibration class.....: Grade-A
Weight (kg).....: 18,0

Environment condition

Ambient temp. min. (°C)....: -20
Ambient temp. max. (°C)....: 45
Altitude (mtr up to).....: 1000

Bearing

DE Bearing.....: 6205-ZZ/C3
NDE Bearing.....: 6205-ZZ/C3
Fixed bearing.....: DE

Terminal box

Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
Main.....: 1 x M20x1,5
Ø8-13mm metal
Accessory.....: 1 x M20x1,5
Metal blindcap
Terminal board thread.....: 6-M4

Test values

Rotor inertia (kgm²).....: 0,0041
Noise level (dB(A)).....: 58
No load current (A).....: 1,70
Winding resist. (ohm).....: 7,93
Starting time (sec.).....: 0,00
Temp. rise winding (K).....: 67
Temp. rise surface (K).....: 59

Motor protection

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: None
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: Yes

Explosion protection

According to.....: None
Type of protection.....: None

General

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage + VFD
Special packing.....: No
Special requirements.....: No

Rated power (kW)	1,50	1,46	1,80	1,74
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	3,25 1,88	3,35 1,94	3,25 1,88	3,35
Speed (rpm)	1440	1440	1730	1730
Power factor cos(phi)	0,81	0,82	0,81	0,81
Efficiency, 100/75/50 (%)	82,8/ 83,7 /82,7	82,8/ 83,7 /82,7	82,8/ 83,7 /82,7	81,6/ 82,6 /81,5
Ist/In	7,95	7,00	7,95	7,35
Full load torque (Nm)	9,95	9,65	9,95	9,65
Tst/Tn	2,50	2,32	2,50	2,16
Tmax/Tn	3,10	2,90	3,10	2,70
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45