


# Data Sheet

Itemnumber.....: 3243153209

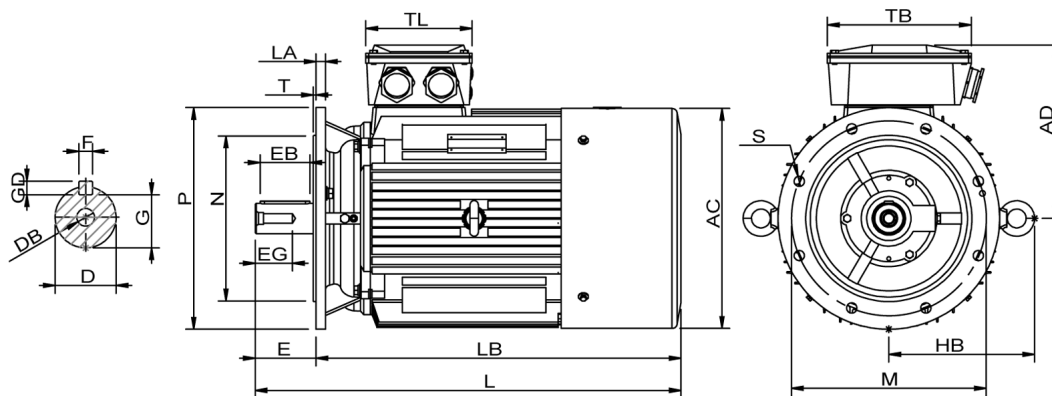

AC = 620	DB = M20	EG = 56	GD = 14	LA = 22	N = 550	T = 6
AD = 546	E = 170	F = 22	HB = 432	LB = 1148	P = 660	TB = 400
D = 80	EB = 140	G = 71	L = 1318	M = 600	S = 8-Ø24	TL = 280

## Version

Type.....: HMC2 315L2-4  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE2  
Pole.....: 4  
Power at 50 Hz (kW).....: 200  
Hz.....: 60 (60 Hz output)  
Voltage.....: 440VD  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 232  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 315  
Mounting.....: B5  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Cast Iron  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 1.170

## Environment condition

Ambient temp. min. (°C)....: -20  
Ambient temp. max. (°C)....: 45  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6319/C3  
NDE Bearing.....: 6319/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Top  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M63x1,5  
                  Ø37-44mm metal  
Accessory.....: 2 x M20x1,5  
                  Metal blindcaps  
Terminal board thread.....: 6-M16

## Motor protection

Thermal protection main....: PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater.....: 220V-230V 1x100W  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: Yes

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage + VFD  
Special packing.....: No  
Special requirements.....: No

## Test values

Rotor inertia (kgm²).....: 4,67  
Noise level (dB(A)).....: 84  
No load current (A).....: 98,5  
Winding resist. (ohm).....: 0,012  
Starting time (sec.).....: 0,26  
Temp. rise winding (K).....: 59  
Temp. rise surface (K).....: 36

Rated power (kW)	200	194	240	232
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	340 196	350 202	340 196	355
Speed (rpm)	1490	1490	1780	1780
Power factor cos(phi)	0,90	0,90	0,90	0,91
Efficiency, 100/75/50 (%)	95,1/ 95,2 /94,8	95,1/ 95,2 /94,8	95,1/ 95,2 /94,8	94,8/ 94,8 /94,4
Ist/In	6,60	5,80	6,60	6,05
Full load torque (Nm)	1.280	1.240	1.280	1.240
Tst/Tn	2,48	2,32	2,48	2,16
Tmax/Tn	2,80	2,60	2,80	2,42
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45