


Data Sheet

Itemnumber....: 3260900109

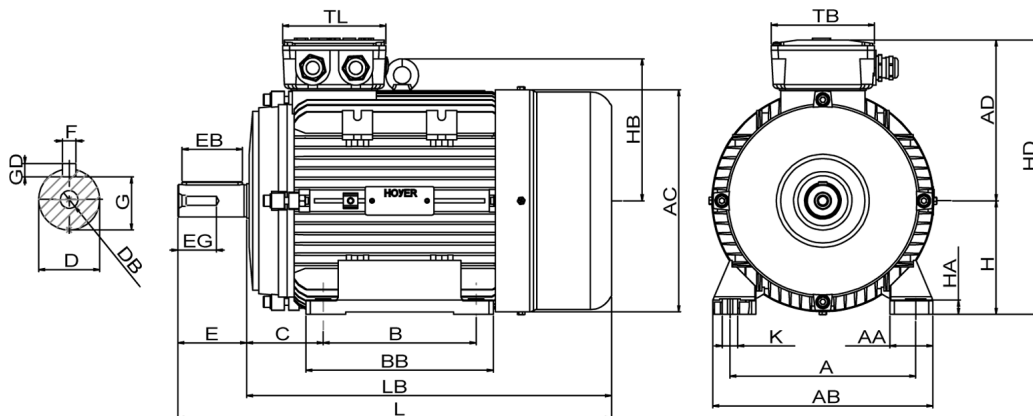

A = 140	AC = 175	BB = 155	DB = M8	EG = 24	GD = 7	HD = 222	LB = 286
AA = 35	AD = 132	C = 56	E = 50	F = 8	H = 90	K = 12	TB = 100
AB = 177	B = 100	D = 24	EB = 40	G = 20	HA = 14	L = 336	TL = 100

Version

Type.....: HMA2 90S-6
Design.....: Induction motor
Standard series.....: IEC 60034
Phase / Voltage range.....: 3~ / Low

Electrical design

Efficiency.....: IE2
Pole.....: 6
Power at 50 Hz (kW).....: 0,75
Hz.....: 60 (60 Hz output)
Voltage.....: 440VY
Winding voltage.....: 230VD/400VY 50 Hz
Power output (kW).....: 0,87
Duty.....: S1
Insulation class.....: F
Temperature rise.....: B

Mechanical design

Frame size.....: 90
Mounting.....: B3
Rain cap.....: No
Protection class.....: IP55
Cooling method.....: IC411/TEFC
External grounding.....: Yes
Drain hole.....: Yes
Frame material.....: Aluminium
Material approval.....: None
Shaft.....: IEC Standard
Key.....: Closed key
Balancing.....: Half key balancing
Vibration class.....: Grade-A
Weight (kg).....: 17,5

Environment condition

Ambient temp. min. (°C)....: -20
Ambient temp. max. (°C)....: 45
Altitude (mtr up to).....: 1000

Bearing

DE Bearing.....: 6205-ZZ/C3
NDE Bearing.....: 6205-ZZ/C3
Fixed bearing.....: DE

Terminal box

Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
Main.....: 1 x M20x1,5
Ø8-13mm metal
Accessory.....: 1 x M20x1,5
Metal blindcap
Terminal board thread.....: 6-M4

Motor protection

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: None
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: Yes

Explosion protection

According to.....: None
Type of protection.....: None

General

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage + VFD
Special packing.....: No
Special requirements.....: No

Test values

Rotor inertia (kgm²).....: 0,0037
Noise level (dB(A)).....: 55
No load current (A).....: 1,44
Winding resist. (ohm).....: 7,27
Starting time (sec.).....: 0,00
Temp. rise winding (K).....: 70
Temp. rise surface (K).....: 65

Rated power (kW)	0,75	0,73	0,90	0,87
Frequency (Hz)	50	50	60	60
Voltage (V)	230 400	220 380	280 480	440
Connection	D Y	D Y	D Y	Y
Full load current (A)	3,55 2,02	3,65 2,08	3,55 2,02	2,08
Speed (rpm)	960	960	1150	1150
Power factor cos(phi)	0,70	0,72	0,70	0,73
Efficiency, 100/75/50 (%)	75,9/ 75,7 /72,4	75,9/ 75,7 /72,4	75,9/ 75,7 /72,4	74,2/ 74,0 /70,5
Ist/In	5,05	4,45	5,05	4,65
Full load torque (Nm)	7,50	7,30	7,50	7,30
Tst/Tn	2,00	1,86	2,00	1,72
Tmax/Tn	2,20	2,04	2,20	1,90
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45