


Data Sheet

Itemnumber..... 5522250400

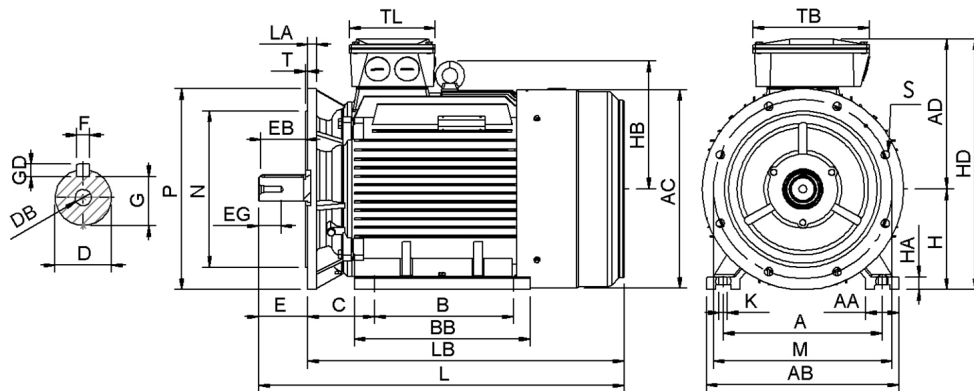

A = 356	AC = 445	BB = 393	DB = M20	EG = 56	GD = 10	HB = 285	L = 818	M = 400	S = 8-Ø18,5	TL = 192
AA = 75	AD = 336	C = 149	E = 110	F = 16	H = 225	HD = 561	LA = 20	N = 350	T = 5	
AB = 431	B = 311	D = 55	EB = 100	G = 49	HA = 28	K = 18,50	LB = 708	P = 450	TB = 260	

Version

Type..... HMC3 225M-2
Design..... Induction motor
Standard series..... IEC 60034
Phase / Voltage range..... 3~ / Low

Electrical design

Efficiency..... IE3
Pole..... 2
Power at 50 Hz (kW)..... 45,0
Hz..... 50
Voltage..... 400VD/690VY
Winding voltage..... 400VD/690VY 50 Hz
Power output (kW)..... 45,0
Duty..... S1
Insulation class..... F
Temperature rise..... B

Mechanical design

Frame size..... 225
Mounting..... B35
Rain cap..... No
Protection class..... IP55
Cooling method..... IC411/TEFC
External grounding..... Yes
Drain hole..... Yes
Frame material..... Cast Iron
Material approval..... None
Shaft..... IEC standard
Key..... Closed key
Balancing..... Half key balancing
Vibration class..... Grade-A
Weight (kg)..... 336

Environment condition

Ambient temp. min. (°C)..... -20
Ambient temp. max. (°C)..... 40
Altitude (mtr up to)..... 1000

Bearing

DE Bearing..... 6312/C3
NDE Bearing..... 6312/C3
Fixed bearing..... DE

Terminal box

Tbox position..... Top
Cable entry direction..... Right (from DE)
Cable entry
Main..... 2 x M50x1,5
Plastic blindcaps
Accessory..... 2 x M20x1,5
Plastic blindcaps
Terminal board thread..... 6-M8

Test values

Rotor inertia (kgm²)..... 0,34
Noise level (dB(A))..... 84
No load current (A)..... 19,2
Winding resist. (ohm)..... 0,094
Starting time (sec.)..... 0,26
Temp. rise winding (K)..... 60
Temp. rise surface (K)..... 40

Motor protection

Thermal protection main..... PTC 3x 155 dgr
Thermal protection second..... None
Space heater..... None
Temperature detector..... No
SPM..... No
IR wire..... No
Tropical insulation..... No

Explosion protection

According to..... None
Type of protection..... None

General

Direction of rotation..... CW
Painting..... RAL 9005
Nameplate..... Multivoltage
Special packing..... No
Special requirements..... No

Rated power (kW)	45,0	43,5	54,0	52,5
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	76,0 44,0	78,0 45,5	76,0 44,0	78,0
Speed (rpm)	2970	2970	3580	3580
Power factor cos(phi)	0,91	0,92	0,91	0,92
Efficiency, 100/75/50 (%)	94,0/ 93,9 /92,9	94,0/ 93,9 /92,9	94,0/ 93,9 /92,9	93,6/ 93,5 /92,4
Ist/In	8,70	7,65	8,70	8,00
Full load torque (Nm)	144	140	144	140
Tst/Tn	3,25	3,05	3,25	2,80
Tmax/Tn	3,45	3,20	3,45	2,95
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45