


Data Sheet

Itemnumber.....: 5522500150

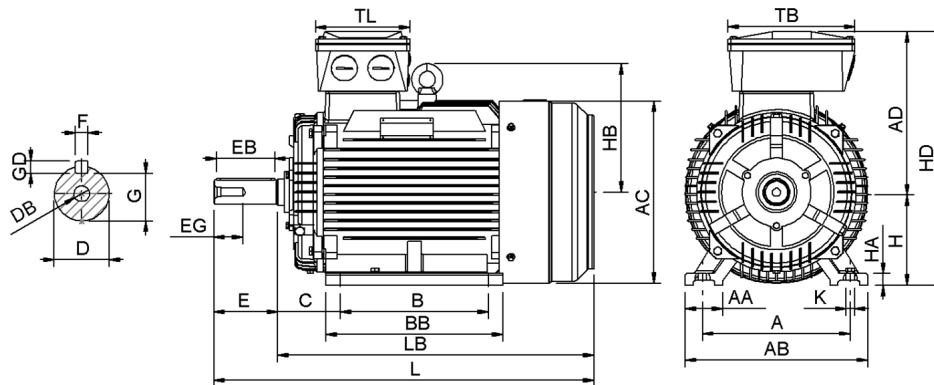

A = 406	AC = 484	BB = 445	DB = M20	EG = 56	GD = 11	HB = 316	L = 909	TL = 230
AA = 80	AD = 374	C = 168	E = 140	F = 18	H = 250	HD = 624	LB = 769	
AB = 484	B = 349	D = 65	EB = 130	G = 58	HA = 30	K = 24	TB = 305	

Version

Type.....: HMC3 250M-2
Design.....: Induction motor
Standard series.....: IEC 60034
Phase / Voltage range.....: 3~ / Low

Electrical design

Efficiency.....: IE3
Pole.....: 2
Power at 50 Hz (kW).....: 55,0
Hz.....: 50
Voltage.....: 230VD/400VY
Winding voltage.....: 230VD/400VY 50 Hz
Power output (kW).....: 55,0
Duty.....: S1
Insulation class.....: F
Temperature rise.....: B

Mechanical design

Frame size.....: 250
Mounting.....: B3
Rain cap.....: No
Protection class.....: IP55
Cooling method.....: IC411/TEFC
External grounding.....: Yes
Drain hole.....: Yes
Frame material.....: Cast Iron
Material approval.....: None
Shaft.....: IEC standard
Key.....: Closed key
Balancing.....: Half key balancing
Vibration class.....: Grade-A
Weight (kg).....: 407

Environment condition

Ambient temp. min. (°C)....: -20
Ambient temp. max. (°C)....: 40
Altitude (mtr up to).....: 1000

Bearing

DE Bearing.....: 6313/C3
NDE Bearing.....: 6313/C3
Fixed bearing.....: DE

Terminal box

Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
Main.....: 2 x M63x1,5
Plastic blindcaps
Accessory.....: 2 x M20x1,5
Plastic blindcaps
Terminal board thread.....: 6-M10

Motor protection

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: None
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: No

Explosion protection

According to.....: None
Type of protection.....: None

General

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage
Special packing.....: No
Special requirements.....: No

Test values

Rotor inertia (kgm²).....: 0,46
Noise level (dB(A)).....: 86
No load current (A).....: 27,5
Winding resist. (ohm).....: 0,022
Starting time (sec.).....: 0,26
Temp. rise winding (K).....: 57
Temp. rise surface (K).....: 38

Rated power (kW)	55,0	53,5	66,0	64,0
Frequency (Hz)	50	50	60	60
Voltage (V)	230 400	220 380	280 480	440
Connection	D Y	D Y	D Y	Y
Full load current (A)	164 94,0	168 97,0	164 94,0	97,0
Speed (rpm)	2980	2980	3580	3580
Power factor cos(phi)	0,90	0,90	0,90	0,91
Efficiency, 100/75/50 (%)	94,3/ 93,9 /92,6	94,3/ 93,9 /92,6	94,3/ 93,9 /92,6	93,9/ 93,5 /92,1
Ist/In	10,8	9,50	10,8	9,90
Full load torque (Nm)	176	172	176	172
Tst/Tn	3,40	3,15	3,40	2,95
Tmax/Tn	3,95	3,65	3,95	3,40
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45