


# Data Sheet

Itemnumber....: 5523153400

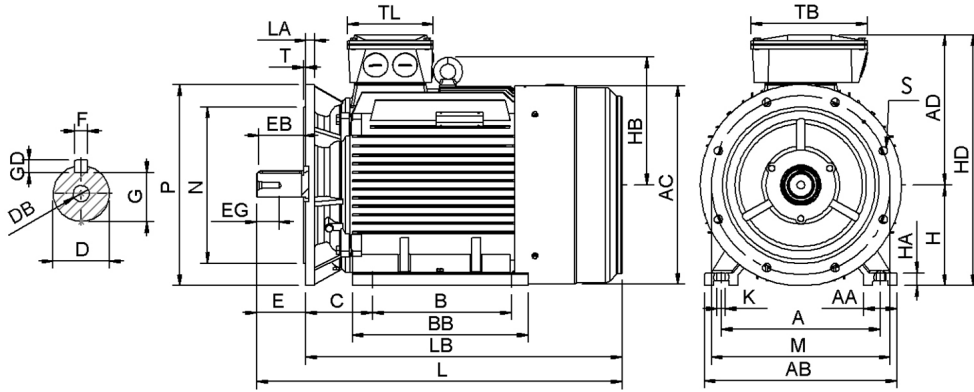

A = 508	AC = 618	BB = 680	DB = M20	EG = 56	GD = 11	HB = 430	L = 1303	M = 600	S = 8-Ø24	TL = 299
AA = 120	AD = 546	C = 216	E = 140	F = 18	H = 315	HD = 861	LA = 22	N = 550	T = 6	
AB = 628	B = 508	D = 65	EB = 130	G = 58	HA = 45	K = 28	LB = 1163	P = 660	TB = 420	

## Version

Type.....: HMC3 315L2-2  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....	IE3
Pole.....	2
Power at 50 Hz (kW).....	200
Hz.....	50
Voltage.....	400VD/690VY
Winding voltage.....	400VD/690VY 50 Hz
Power output (kW).....	200
Duty.....	S1
Insulation class.....	F
Temperature rise.....	B

## Mechanical design

Frame size.....	315
Mounting.....	B35
Rain cap.....	No
Protection class.....	IP55
Cooling method.....	IC411/TEFC
External grounding.....	Yes
Drain hole.....	Yes
Frame material.....	Cast Iron
Material approval.....	None
Shaft.....	IEC standard
Key.....	Closed key
Balancing.....	Half key balancing
Vibration class.....	Grade-A
Weight (kg).....	1.147

## Environment condition

```
Ambient temp. min. (°C)..: -20
Ambient temp. max. (°C)..: 40
Altitude (mtr up to).....: 1000
```

## Motor protection

```

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: None
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: No

```

## Explosion protection

```
According to.....: None
Type of protection.....: None
```

## General

```

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage
Special packing.....: No
Special requirements.....: No

```

Bearing

```
DE Bearing.....: 6317/C3
NDE Bearing.....: 6317/C3
Fixed bearing.....: DE
```

Terminal box

```
Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
    Main.....: 2 x M63x1,5
                Metal blindcaps
    Accessory.....: 2 x M20x1,5
                Metal blindcaps
Terminal board thread.....: 6-M16
```

Test values

```

Rotor inertia (kgm2).....: 2,61
Noise level (dB(A)).....: 90
No load current (A).....: 84,5
Winding resist. (ohm).....: 0,012
Starting time (sec.).....: 0,65
Temp. rise winding (K).....: 77
Temp. rise surface (K).....: 43

```

Rated power (kW)	200	194	240	232
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	330 192	340 198	330 192	340
Speed (rpm)	2980	2980	3580	3580
Power factor cos(phi)	0,92	0,92	0,92	0,93
Efficiency, 100/75/50 (%)	95,8/ 95,6 /94,6	95,8/ 95,6 /94,6	95,8/ 95,6 /94,6	95,5/ 95,2 /94,2
Ist/In	8,60	7,55	8,60	7,90
Full load torque (Nm)	640	620	640	620
Tst/Tn	2,08	1,94	2,08	1,80
Tmax/Tn	2,80	2,60	2,80	2,42
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45