


# Data Sheet

Itemnumber....: 5542800110

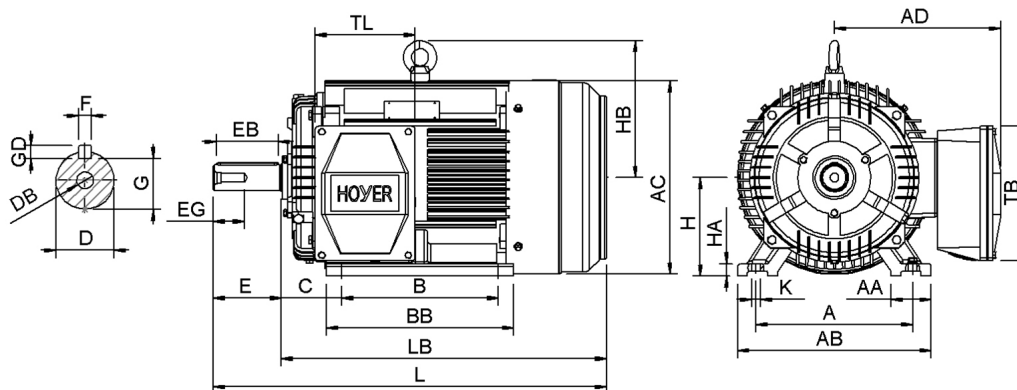

A = 457	AC = 546	BB = 485	DB = M20	EG = 56	GD = 12	HB = 361	LB = 839
AA = 85	AD = 403	C = 190	E = 140	F = 20	H = 280	K = 24	TB = 305
AB = 542	B = 368	D = 75	EB = 130	G = 67,50	HA = 35	L = 979	TL = 230

## Version

Type.....: HMC3 280S-4  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE3  
Pole.....: 4  
Power at 50 Hz (kW).....: 75,0  
Hz.....: 50  
Voltage.....: 400VD/690VY  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 75,0  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 280  
Mounting.....: B3  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Cast Iron  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 565

## Environment condition

Ambient temp. min. (°C)...: -20  
Ambient temp. max. (°C)...: 40  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6317/C3  
NDE Bearing.....: 6314/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Right  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M63x1,5  
Plastic blindcaps  
Accessory.....: 2 x M20x1,5  
Plastic blindcaps  
Terminal board thread.....: 6-M10

## Motor protection

Thermal protection main....: PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater.....: None  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: No

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage  
Special packing.....: No  
Special requirements.....: No

## Test values

Rotor inertia (kgm²).....: 1,74  
Noise level (dB(A)).....: 78  
No load current (A).....: 39,0  
Winding resist. (ohm).....: 0,048  
Starting time (sec.).....: 0,28  
Temp. rise winding (K).....: 57  
Temp. rise surface (K).....: 37

Rated power (kW) . . . . .	75,0	73,0	90,0	87,5
Frequency (Hz) . . . . .	50	50	60	60
Voltage (V) . . . . .	400 690	380 660	480 830	440
Connection . . . . .	D Y	D Y	D Y	D
Full load current (A) . . . .	124 72,0	128 74,5	124 72,0	128
Speed (rpm) . . . . .	1490	1490	1790	1790
Power factor cos(phi) . . . .	0,88	0,89	0,88	0,89
Efficiency, 100/75/50 (%) . .	95,0/ 94,8 /93,8	95,0/ 94,8 /93,8	95,0/ 94,8 /93,8	94,7/ 94,5 /93,4
Ist/In . . . . .	7,25	6,40	7,25	6,70
Full load torque (Nm) . . . .	480	465	480	465
Tst/Tn . . . . .	2,28	2,12	2,28	1,98
Tmax/Tn . . . . .	2,80	2,60	2,80	2,42
Duty . . . . .	S1	S1	S1	S1
Ambient temp. (°C) . . . . .	40	45	40	45