


# Data Sheet

Itemnumber.....: 5543152102

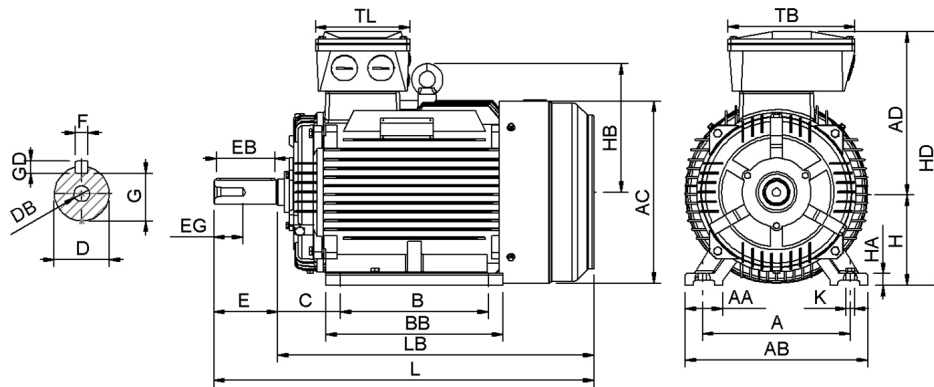

A = 508	AC = 618	BB = 680	DB = M20	EG = 56	GD = 14	HB = 430	L = 1333	TL = 299
AA = 120	AD = 546	C = 216	E = 170	F = 22	H = 315	HD = 861	LB = 1163	
AB = 628	B = 508	D = 80	EB = 160	G = 71	HA = 45	K = 28	TB = 420	

## Version

Type.....: HMC3 315L1-4  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE3  
Pole.....: 4  
Power at 50 Hz (kW).....: 160  
Hz.....: 50  
Voltage.....: 400VD/690VY  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 160  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 315  
Mounting.....: B3  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Cast Iron  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 1.078

## Environment condition

Ambient temp. min. (°C)....: -20  
Ambient temp. max. (°C)....: 40  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6319/C3  
NDE Bearing.....: 6319/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Top  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M63x1,5  
Plastic blindcaps  
Accessory.....: 2 x M20x1,5  
Plastic blindcaps  
Terminal board thread.....: 6-M16

## Motor protection

Thermal protection main....: PTC 3x 155 dgr  
Thermal protection second..: None  
Space heater.....: None  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: No

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage  
Special packing.....: No  
Special requirements.....: No

## Test values

Rotor inertia (kgm²).....: 4,60  
Noise level (dB(A)).....: 84  
No load current (A).....: 69,5  
Winding resist. (ohm).....: 0,021  
Starting time (sec.).....: 0,35  
Temp. rise winding (K).....: 63  
Temp. rise surface (K).....: 36

Rated power (kW)	160	156	192	186
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	265 154	275 158	265 154	275
Speed (rpm)	1490	1490	1790	1790
Power factor cos(phi)	0,92	0,92	0,92	0,92
Efficiency, 100/75/50 (%)	95,8/ 96,1 /95,2	95,8/ 96,1 /95,2	95,8/ 96,1 /95,2	95,5/ 95,8 /94,9
Ist/In	7,80	6,85	7,80	7,20
Full load torque (Nm)	1.020	995	1.020	995
Tst/Tn	2,26	2,12	2,26	1,96
Tmax/Tn	2,70	2,50	2,70	2,34
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45