


Data Sheet

Itemnumber.....: 5561000309

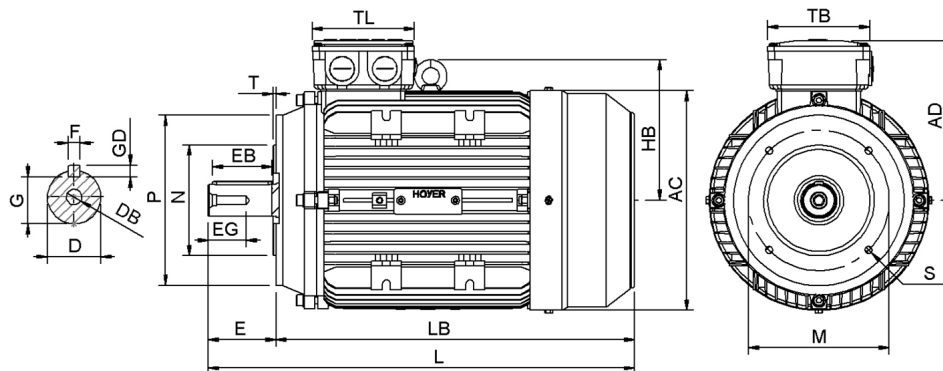

AC = 198	DB = M10	EG = 28	GD = 7	LB = 346	P = 160	TB = 100
AD = 147	E = 60	F = 8	HB = 135	M = 130	S = 4-M8	TL = 100
D = 28	EB = 50	G = 24	L = 406	N = 110	T = 3,50	

Version

Type.....: HMA3 100L-6
Design.....: Induction motor
Standard series.....: IEC 60034
Phase / Voltage range.....: 3~ / Low

Electrical design

Efficiency.....: IE3
Pole.....: 6
Power at 50 Hz (kW).....: 1,50
Hz.....: 50
Voltage.....: 230VD/400VY
Winding voltage.....: 230VD/400VY 50 Hz
Power output (kW).....: 1,50
Duty.....: S1
Insulation class.....: F
Temperature rise.....: B

Mechanical design

Frame size.....: 100
Mounting.....: B14
B14 M measure.....: 130
Rain cap.....: No
Protection class.....: IP55
Cooling method.....: IC411/TEFC
External grounding.....: Yes
Drain hole.....: Yes
Frame material.....: Aluminium
Material approval.....: None
Shaft.....: IEC standard
Key.....: Closed key
Balancing.....: Half key balancing
Vibration class.....: Grade-A
Weight (kg).....: 23,6

Environment condition

Ambient temp. min. (°C)....: -20
Ambient temp. max. (°C)....: 40
Altitude (mtr up to).....: 1000

Bearing

DE Bearing.....: 6206-ZZ/C3
NDE Bearing.....: 6206-ZZ/C3
Fixed bearing.....: DE

Terminal box

Tbox position.....: Top
Cable entry direction.....: Right (from DE)
Cable entry
Main.....: 2 x M20x1,5
Plastic blindcaps
Accessory.....: 1 x M20x1,5
Plastic blindcap
Terminal board thread.....: 6-M4

Motor protection

Thermal protection main....: PTC 3x 155 dgr
Thermal protection second..: None
Space heater.....: None
Temperature detector.....: No
SPM.....: No
IR wire.....: No
Tropical insulation.....: No

Explosion protection

According to.....: None
Type of protection.....: None

General

Direction of rotation.....: CW
Painting.....: RAL 9005
Nameplate.....: Multivoltage
Special packing.....: No
Special requirements.....: No

Test values

Rotor inertia (kgm²).....: 0,012
Noise level (dB(A)).....: 53
No load current (A).....: 2,65
Winding resist. (ohm).....: 3,22
Starting time (sec.).....: 0,04
Temp. rise winding (K).....: 58
Temp. rise surface (K).....: 46

Rated power (kW)	1,50	1,46	1,80	1,74
Frequency (Hz)	50	50	60	60
Voltage (V)	230 400	220 380	280 480	440
Connection	D Y	D Y	D Y	Y
Full load current (A)	6,60 3,80	6,80 3,90	6,60 3,80	3,90
Speed (rpm)	960	960	1150	1150
Power factor cos(phi)	0,69	0,71	0,69	0,72
Efficiency, 100/75/50 (%)	82,5/ 82,4 /79,9	82,5/ 82,4 /79,9	82,5/ 82,4 /79,9	81,3/ 81,2 /78,4
Ist/In	5,90	5,15	5,90	5,40
Full load torque (Nm)	14,8	14,4	14,8	14,4
Tst/Tn	2,55	2,38	2,55	2,20
Tmax/Tn	2,80	2,60	2,80	2,42
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45