


# Data Sheet

Itemnumber.....: 6021321300

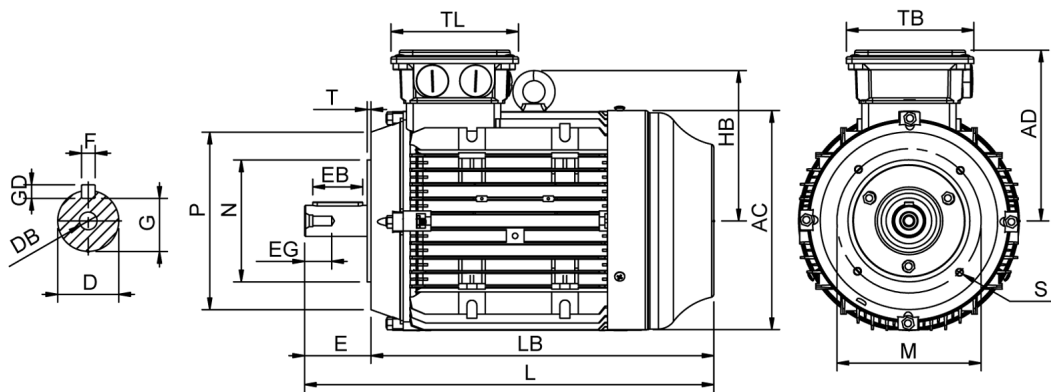

AC = 260	DB = M12	EG = 30	GD = 8	LB = 395	P = 200	TB = 138
AD = 192	E = 80	F = 10	HB = 180	M = 165	S = 4-M10	TL = 138
D = 38	EB = 70	G = 33	L = 475	N = 130	T = 3,50	

## Version

Type.....: HMA4 132S2-2  
Design.....: Induction motor  
Standard series.....: IEC 60034  
Phase / Voltage range.....: 3~ / Low

## Electrical design

Efficiency.....: IE4  
Pole.....: 2  
Power at 50 Hz (kW).....: 7,50  
Hz.....: 50  
Voltage.....: 400VD/690VY  
Winding voltage.....: 400VD/690VY 50 Hz  
Power output (kW).....: 7,50  
Duty.....: S1  
Insulation class.....: F  
Temperature rise.....: B

## Mechanical design

Frame size.....: 132  
Mounting.....: B14  
B14 M measure.....: 165  
Rain cap.....: No  
Protection class.....: IP55  
Cooling method.....: IC411/TEFC  
External grounding.....: Yes  
Drain hole.....: Yes  
Frame material.....: Aluminium  
Material approval.....: None  
Shaft.....: IEC standard  
Key.....: Closed key  
Balancing.....: Half key balancing  
Vibration class.....: Grade-A  
Weight (kg).....: 50,0

## Environment condition

Ambient temp. min. (°C).....: -20  
Ambient temp. max. (°C).....: 40  
Altitude (mtr up to).....: 1000

## Bearing

DE Bearing.....: 6208-ZZ/C3  
NDE Bearing.....: 6206-ZZ/C3  
Fixed bearing.....: DE

## Terminal box

Tbox position.....: Top  
Cable entry direction.....: Right (from DE)  
Cable entry  
Main.....: 2 x M32x1,5  
Plastic blindcaps  
Accessory.....: 1 x M20x1,5  
Plastic blindcap  
Terminal board thread.....: M5

## Test values

Rotor inertia (kgm²).....: 0,028  
Noise level (dB(A)).....: 68  
Starting time (sec.).....: 0,12

## Motor protection

Thermal protection main.....: PTC 3x 155 dgr  
Thermal protection second.....: None  
Space heater.....: None None  
Temperature detector.....: No  
SPM.....: No  
IR wire.....: No  
Tropical insulation.....: No

## Explosion protection

According to.....: None  
Type of protection.....: None

## General

Direction of rotation.....: CW  
Painting.....: RAL 9005  
Nameplate.....: Multivoltage  
Special packing.....: No  
Special requirements.....: No

Rated power (kW)	7,50	7,30	9,00	8,75
Frequency (Hz)	50	50	60	60
Voltage (V)	400 690	380 660	480 830	440
Connection	D Y	D Y	D Y	D
Full load current (A)	13,2 7,70	13,6 7,90	13,2 7,70	13,6
Speed (rpm)	2930	2930	3520	3520
Power factor cos(phi)	0,89	0,90	0,89	0,90
Efficiency, 100/75/50 (%)	91,7/91,2/90,5	91,7/91,2/90,5	91,7/91,2/90,5	91,1/90,6/89,8
Ist/In	10,2	8,90	10,2	9,30
Full load torque (Nm)	24,4	23,8	24,4	23,8
Tst/Tn	3,20	3,00	3,20	2,75
Tmax/Tn	3,90	3,65	3,90	3,40
Duty	S1	S1	S1	S1
Ambient temp. (°C)	40	45	40	45