

**Disclaimer:**  
Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

F12-182-LF-FV-G-000-0000-P0

F12-182



Pump & Motor Division Europe






F11 Pump



F12 Pump

F12-182	Pump	
Displacement	179.8 cc/rev	
Max speed	1500 rpm	Intermittent
Max speed	1500 rpm	Continuously
Max pressure	480 bar	Intermittent
Max pressure	420 bar	Continuously
Max Torque	1403.0 Nm	
Torque	2.854 Nm/bar	
Max Flow	264.6 Lpm	
Max Power	237.4 kW	

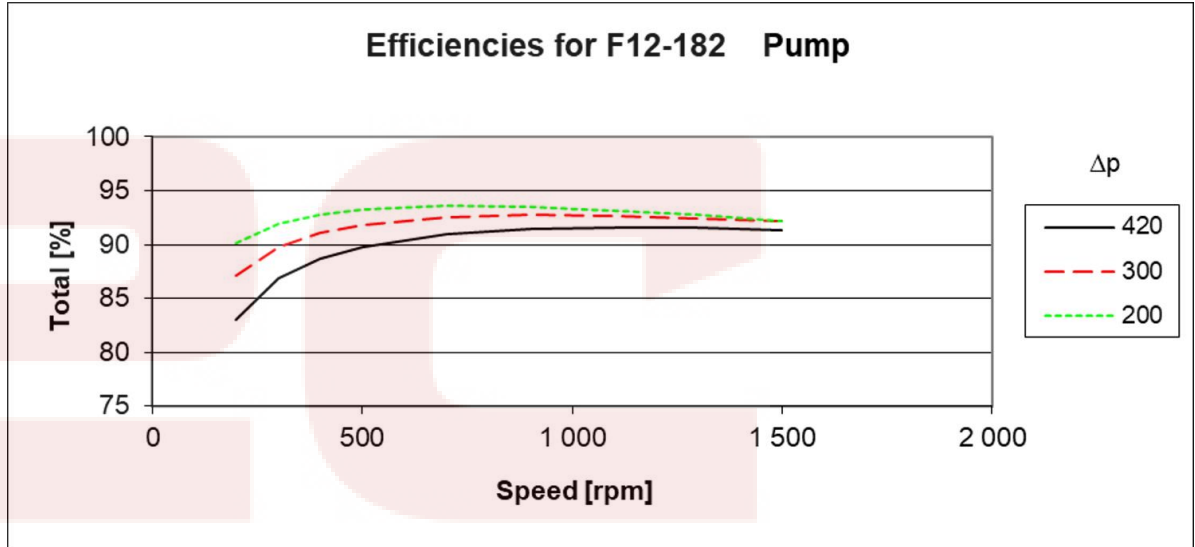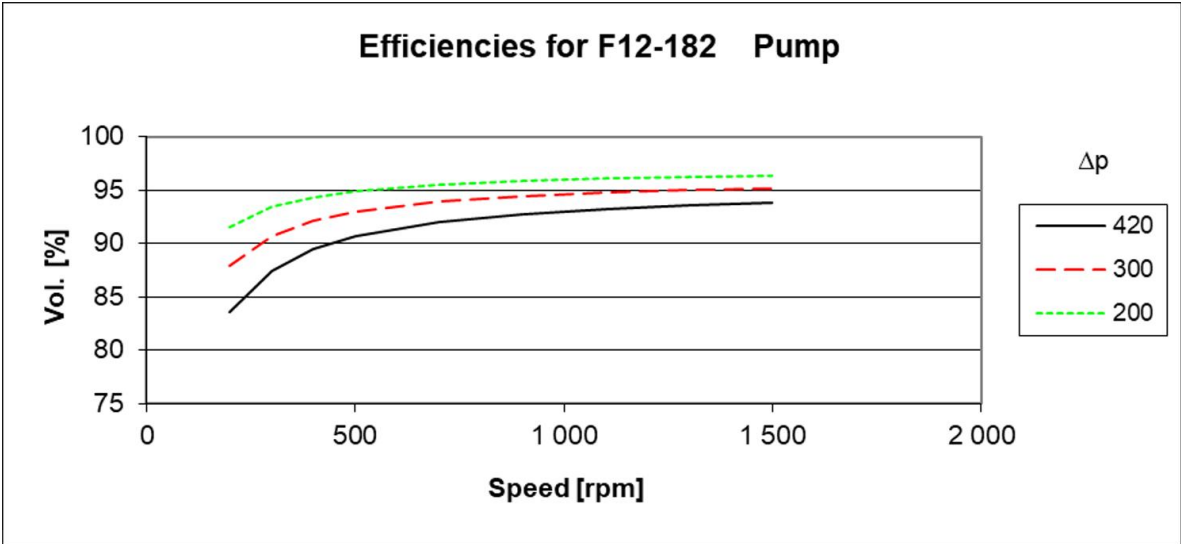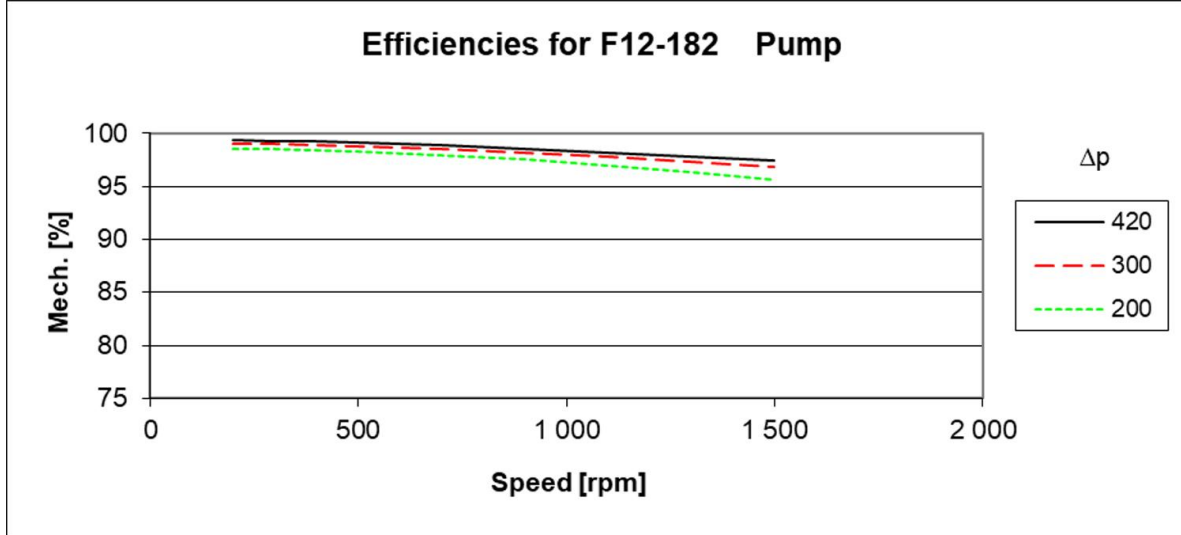

Rpm	200			300			400			500			700			900			1100			1300			1500		
Bar	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW	l/min	Nm	kW
50	34.8	152.1	3.3	52.5	151.8	4.9	70.2	151.7	6.5	87.9	151.9	8.2	123.2	153.1	11.5	158.6	155.1	15.0	193.9	157.7	18.6	229.2	161.0	22.4	264.6	164.8	26.5
100	34.2	294.6	6.5	51.8	294.4	9.7	69.4	294.5	12.8	87.0	294.9	16.0	122.2	296.3	22.4	157.4	298.5	29.0	192.6	301.4	35.7	227.8	304.8	42.7	263.0	308.8	49.9
150	33.6	437.1	9.8	51.1	437.0	14.5	68.6	437.3	19.2	86.2	437.8	24.0	121.2	439.4	33.5	156.3	441.9	43.2	191.3	445.0	53.1	226.4	448.6	63.2	261.5	452.8	73.6
200	32.9	579.6	13.3	50.4	579.7	19.6	67.8	580.1	25.8	85.3	580.7	32.1	120.2	582.6	44.8	155.1	585.3	57.7	190.1	588.6	70.7	225.0	592.4	84.0	259.9	596.8	97.5
250	32.3	722.0	16.9	49.7	722.3	24.7	67.0	722.8	32.6	84.4	723.6	40.4	119.2	725.8	56.3	154.0	728.7	72.4	188.8	732.2	88.6	223.5	736.3	105.1	258.3	740.8	121.8
300	31.6	864.5	20.7	48.9	864.9	30.0	66.3	865.6	39.5	83.6	866.5	48.9	118.2	869.0	68.0	152.8	872.1	87.3	187.5	875.8	106.7	222.1	880.1	126.4	256.7	884.7	146.4
350	31.0	1007.0	24.6	48.2	1007.6	35.5	65.5	1008.4	46.5	82.7	1009.5	57.6	117.2	1012.1	79.9	151.7	1015.5	102.4	186.2	1019.4	125.1	220.7	1023.9	148.0	255.2	1028.7	171.2
400	30.3	1149.5	28.6	47.5	1150.2	41.2	64.7	1151.2	53.8	81.8	1152.4	66.5	116.2	1155.3	92.0	150.5	1158.9	117.7	184.9	1163.1	143.7	219.2	1167.7	169.9	253.6	1172.7	196.4
480	29.2	1377.4	35.6	46.3	1378.4	50.6	63.4	1379.6	65.8	80.4	1381.1	81.0	114.6	1384.4	111.8	148.7	1388.4	142.8	182.8	1392.8	174.0	216.9	1397.8	205.6	251.1	1403.0	237.4

**Disclaimer:**  
Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

F12-182-LF-FV-G-000-0000-P0

F12-182




Pump & Motor Division Europe



F11 Pump



F12 Pump

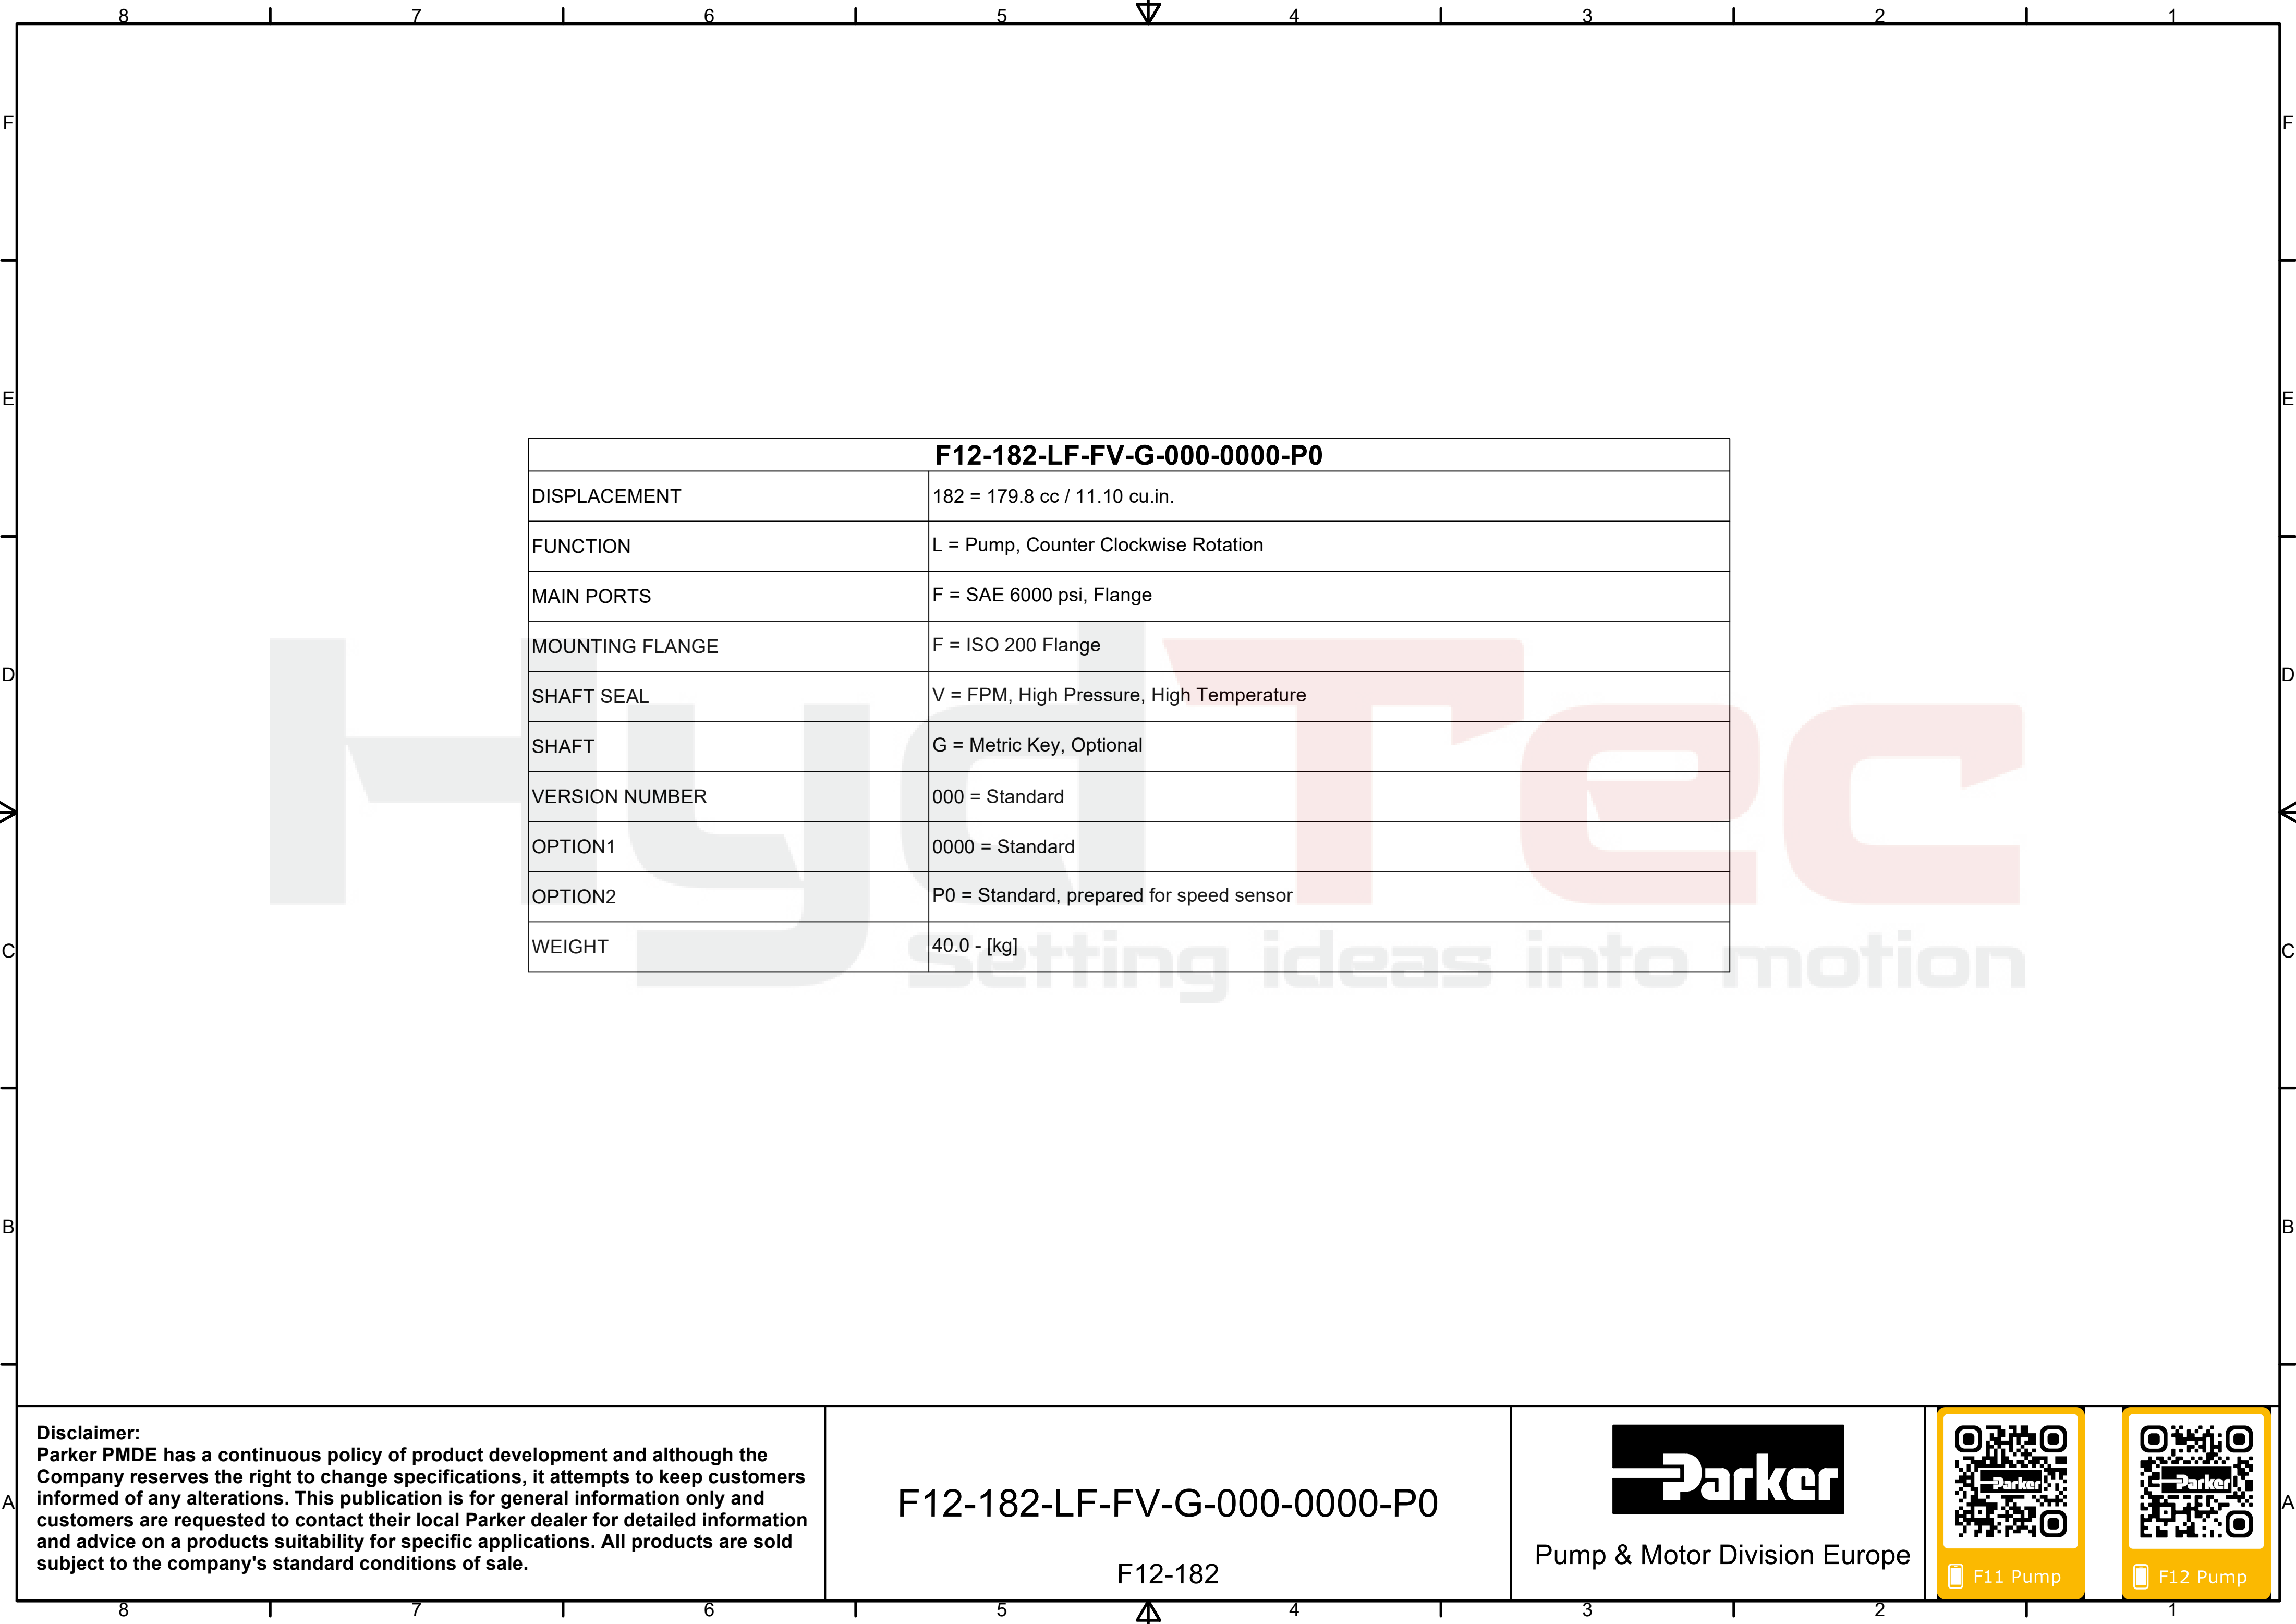

F12-182-LF-FV-G-000-0000-P0	
DISPLACEMENT	182 = 179.8 cc / 11.10 cu.in.
FUNCTION	L = Pump, Counter Clockwise Rotation
MAIN PORTS	F = SAE 6000 psi, Flange
MOUNTING FLANGE	F = ISO 200 Flange
SHAFT SEAL	V = FPM, High Pressure, High Temperature
SHAFT	G = Metric Key, Optional
VERSION NUMBER	000 = Standard
OPTION1	0000 = Standard
OPTION2	P0 = Standard, prepared for speed sensor
WEIGHT	40.0 - [kg]

**Disclaimer:**  
Parker PMDE has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact their local Parker dealer for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

F12-182-LF-FV-G-000-0000-P0

F12-182



Pump & Motor Division Europe



F11 Pump



F12 Pump