



Visit our homepage
for additional support
parker.com/pmde


Bulletin MSG30-8215-INST/UK

Installation and start-up information VP1-045/-060/-075 variable displ. pump

Effective: November 2021
Supersedes: October 2019

Please note:

Some PTO:s don't follow the ISO mounting standard. Therefore, a gasket and a steel spacer should be installed between the pump and the PTO; refer to the illustration right.

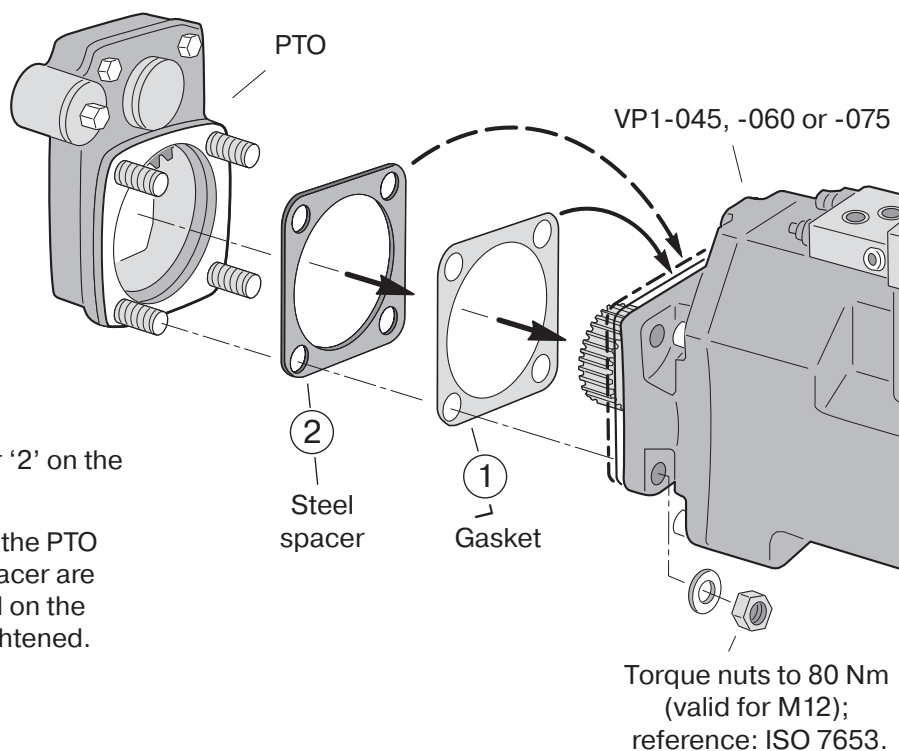

- Install gasket '1' and steel spacer '2' on the $\varnothing 80$ mm VP1 pilot diameter.
- Carefully install the VP1 pump on the PTO studs; make sure gasket and spacer are properly located on the studs and on the pump pilot before the nuts are tightened.

Parker Hannifin Manufacturing Sweden AB
Pump & Motor Division Europe
Flygmotorvägen 2
461 82 Trollhättan / Sweden
Tel. +46 (0)520 40 45 00
www.parker.com/pmde

MSG30-8215-INST/UK
Art. No 378 3606

© Copyright 2021
All rights reserved



ENGINEERING YOUR SUCCESS.